


RELAY MODULE PM-RX2

QUICK SET-UP GUIDE



1 power the relay module and briefly press the «prog» button. One LED lits up to indicate programming mode.

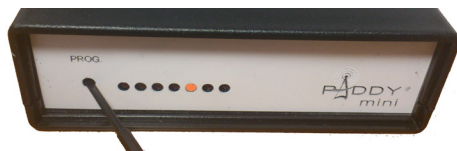

2 Press firmly the «prog» button to lit up the A, B, or both LEDs to indicate which relay(s) must be programmed.



3 press and hold the «prog» button for 2 sec. to enter relay mode (see below) then briefly press «prog» again to choose the mode



4 press the transmitter button twice to record the action. Two LEDs are flashing. Now the button will trigger the requested action on the relay.



- ○ ○ ● ○ ○ ○ enter programming mode
- ○ ● ● ○ ○ ○ Relay A selected
- ● ○ ● ○ ○ ○ Relay B selected
- ● ● ● ○ ○ ○ Relays A and B selected
- ○ ● ● ● ● ● Relay A ON (closed)
- ○ ● ● ○ ● ● Relay A OFF (open)
- ○ ● ● ● ○ ● Relay A Timer mode
- ○ ● ● ○ ○ ● Relay A switch mode (change status)
- ○ ● ● ● ● ○ Relay A push button mode
- ● ● ○ ○ ○ ○ recording (flashing)

timer mode : after pressing twice the transmitter button for recording, the unit counts the elapsed time; press the «prog» button to stop the count. The relay will then keep closed for the recorded time, each time the button is pressed.